

Testing scientific code

Because you're worth it

please fork and clone the
repository
git.aspp.school/ASPP/2024-heraklion-testing-debugging

Lisa Schwetlick and Pamela Hathway



You, as the Master of Research

You start a new project, let's say with a new simulation method or a new dataset and have a few ideas for possible analyses.

You **implement the analyses as prototypes**; once each prototype is finished, you can **confidently decide** whether it is a dead end, or worth pursuing.

Once you find an idea on which it is worth spending energy, you take the prototype and **easily re-organize and optimize it** so that it scales up to the full size of your problem.

As expected, the scaled-up experiment delivers good results, and your next paper is under way.

How to reach enlightenment

- How do we get to the blessed state of **confidence** and **efficiency**?
- Being a Python expert is not sufficient, good programming practices make a big difference
- We can learn a lot from the development methods developed for commercial and open source software




Outline

- The agile programming cycle
- Testing scientific code basics
- Testing patterns for scientific code
- Debugging
- Continuous Integration

Warm-up project

- Go to the directory called `hands_on/local_maxima`
- In the file called `local_maxima.py`, write a function `find_maxima` that finds the indices of local maxima in a list of numbers

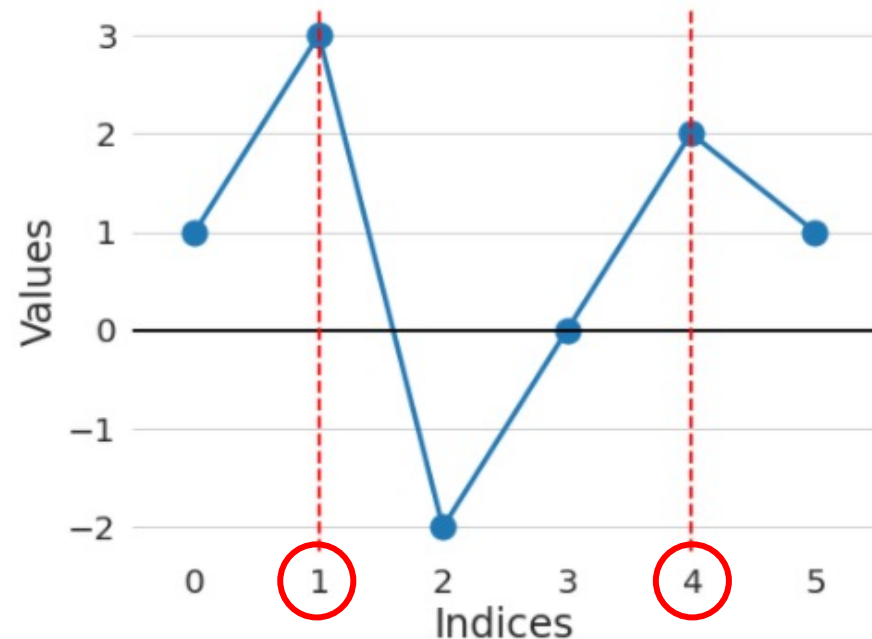

For example,
`find_maxima([1, 3, -2, 0, 2, 1])`
should return
`[1, 4]`



Warm-up project

- Write a function `find_maxima` that finds the indices of local maxima in a list of numbers
- Check your solution with these inputs:
 - Input: `[1, 3, -2, 0, 2, 1]` Expected result: `[1, 4]`
 - Input: `[4, 2, 1, 3, 1, 5]` Expected result: `[0, 3, 5]`
 - Input: `[]` Expected result: `[]`
 - Input: `[1, 2, 2, 1]` Expected result: `[1]` (or `[2]`, or `[1, 2]`)
 - Input: `[1, 2, 2, 3, 1]` Expected result: `[3]`



The agile programming cycle

The illustration depicts a complex, multi-layered system of orange and blue tracks and platforms. Numerous monkeys are shown in various poses and activities across these levels. Some are sitting on platforms, some are holding tools or devices, and some are interacting with the tracks. The background is a gradient of blue and green, with small floating objects like spheres and gears. The overall scene suggests a dynamic and interconnected process.

The agile development cycle

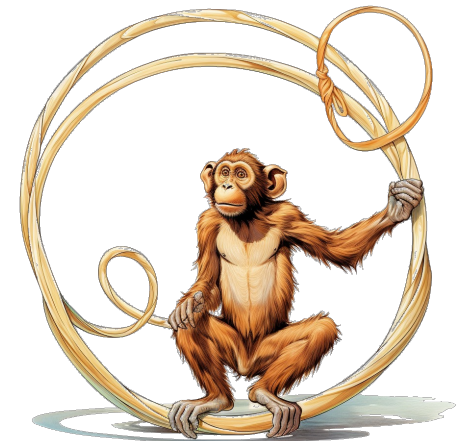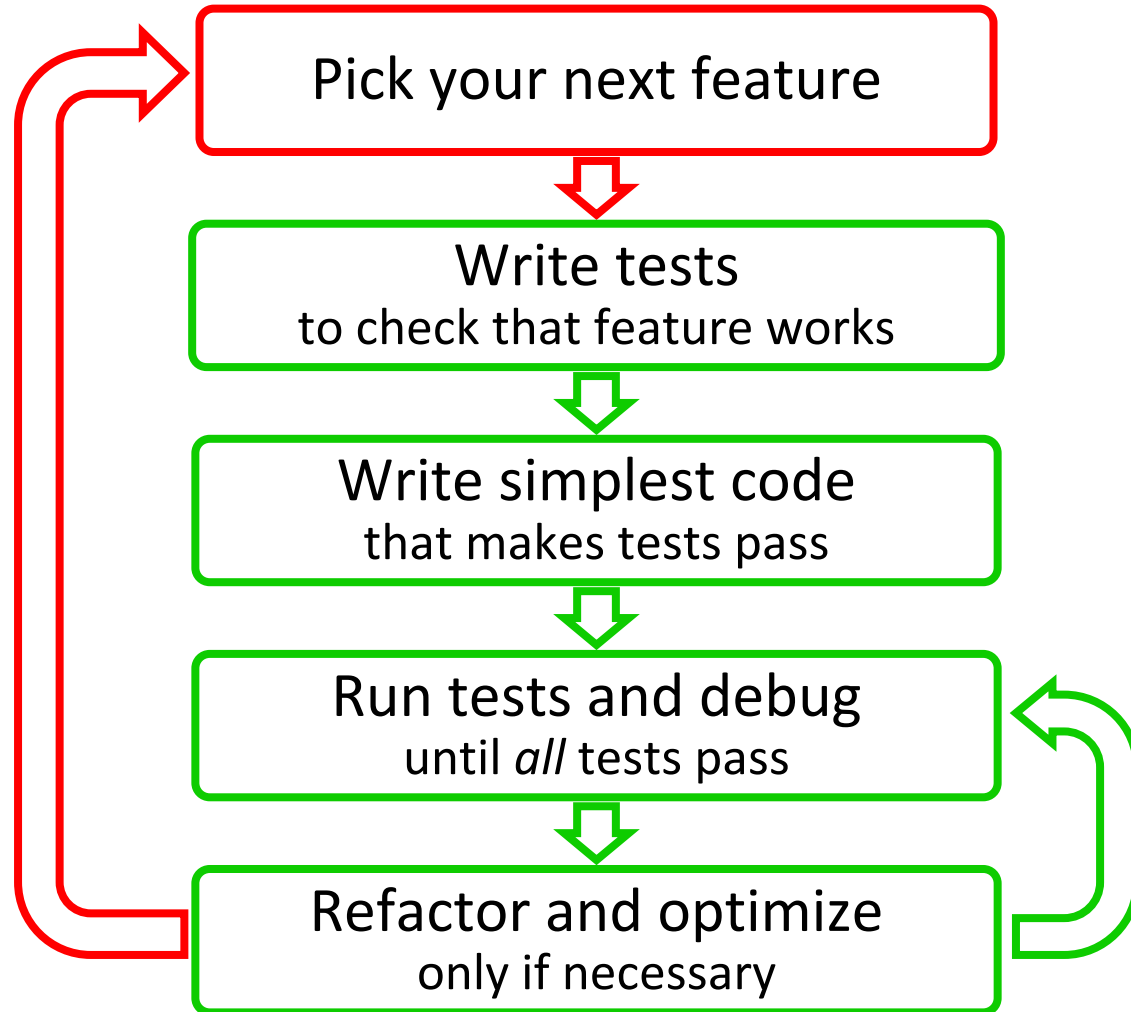

Python tools for agile development

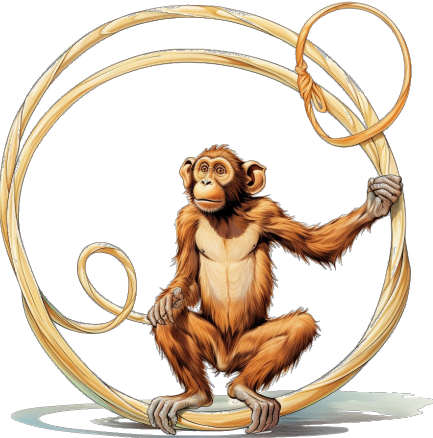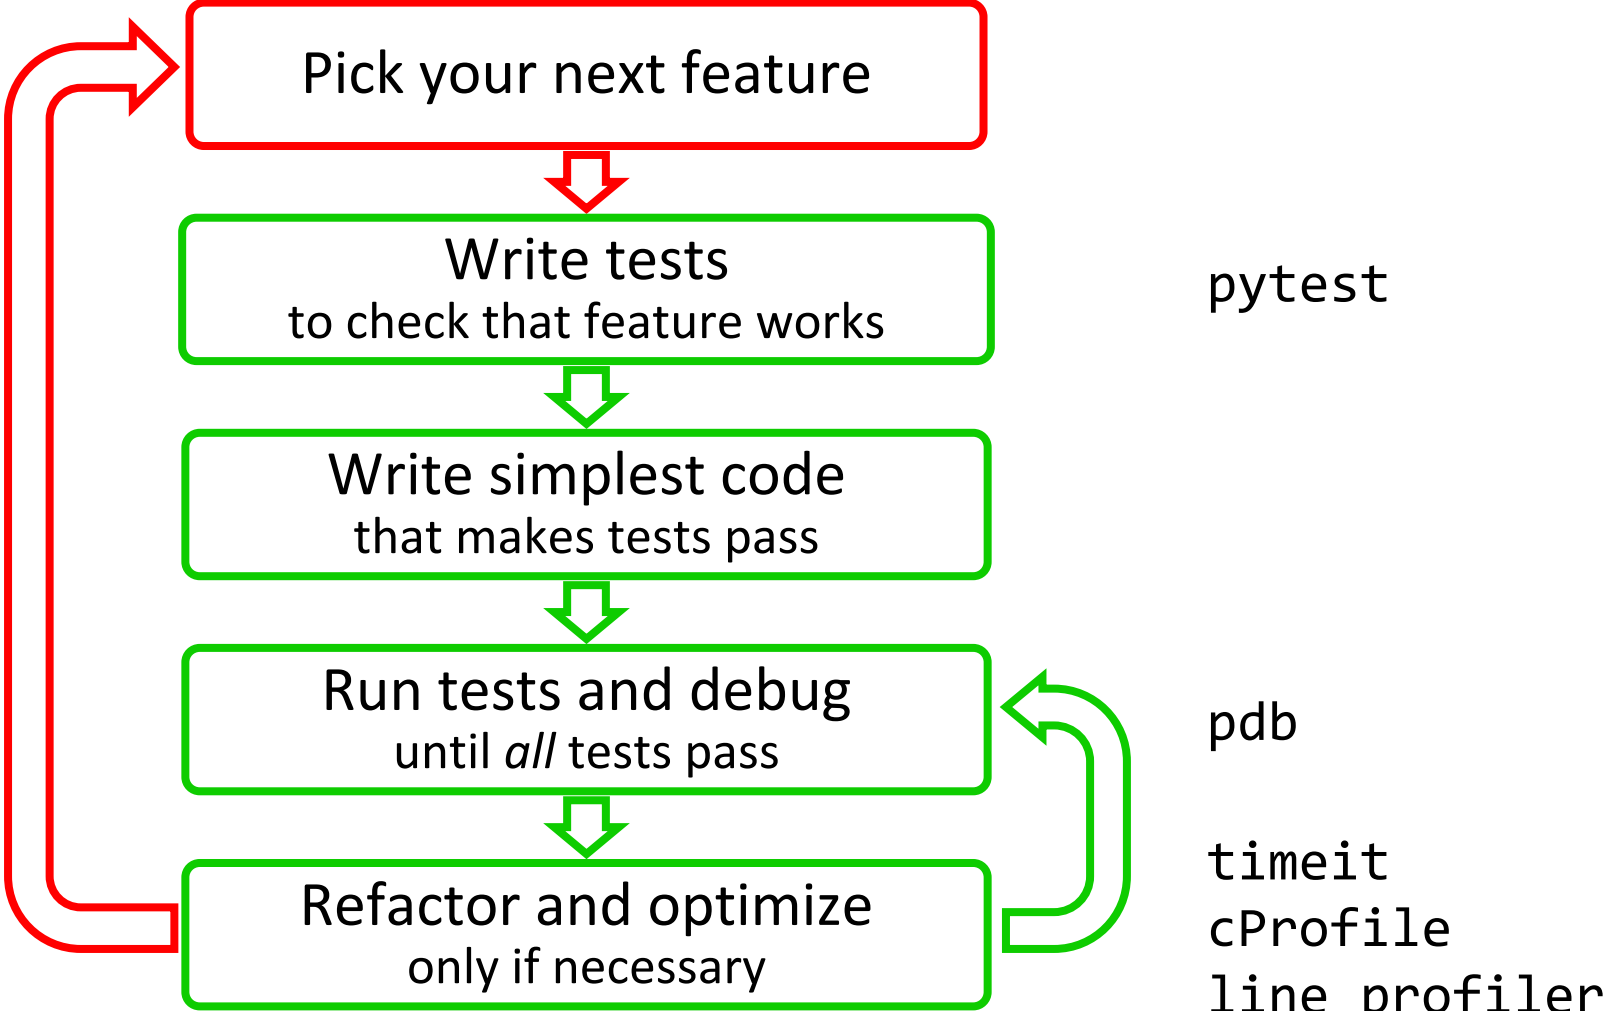


Why test scientific code?

A person in a space suit is sitting on a rocky ledge, looking at a tablet. The background is a vast, layered landscape of rock formations, possibly a canyon or a desert, with a path leading through the center. The scene is illuminated by warm, golden light, suggesting a sunset or sunrise.

Why write tests at all?

- **Confidence while re-using code:**
 - Write the code once and use it confidently everywhere else:
*avoid the **negative result effect!***
- **Confidence while editing code:**
 - When you have tests, you can change any part of your code and you will be confident that you have not changed the result
 - change any line in the code
 - Refactor to improve readability/speed/memory usage
- **Confidence in correctness:**
 - Correctness is main requirement for scientific code
 - You **must** have a strategy to ensure correctness

Effect of software bugs in science

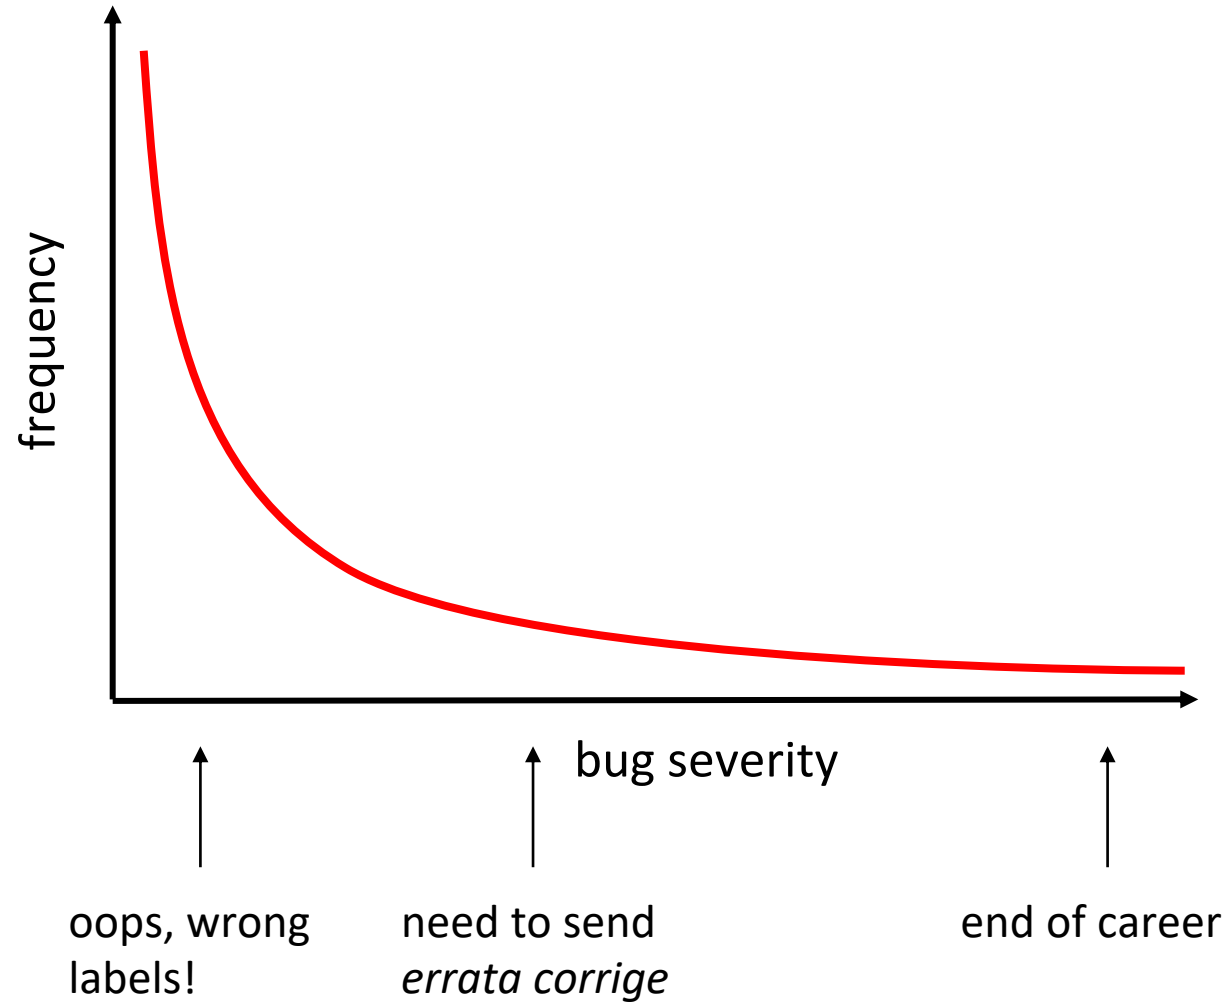

The unfortunate story of Geoffrey Chang

Science, Dec 2006: 5 high-profile retractions (3x Science, PNAS, J. Mol. Biol.) because "an in-house data reduction program introduced a change in sign for anomalous differences"

SCIENTIFIC PUBLISHING

A Scientist's Nightmare: Software Problem Leads to Five Retractions

Until recently, Geoffrey Chang's career was on a trajectory most young scientists only dream about. In 1999, at the age of 28, the protein crystallographer landed a faculty position at the prestigious Scripps Research Institute in San Diego, California. The next year, in a cer-

2001 *Science* paper, which described the structure of a protein called MsbA, isolated from the bacterium *Escherichia coli*. MsbA belongs to a huge and ancient family of molecules that use energy from adenosine triphosphate to transport molecules across cell membranes. These

LETTERS

edited by Etta Kavanagh

Retraction

WE WISH TO RETRACT OUR RESEARCH ARTICLE "STRUCTURE OF MsbA from *E. coli*: A homolog of the multidrug resistance ATP binding cassette (ABC) transporters" and both of our Reports "Structure of the ABC transporter MsbA in complex with ADP•vanadate and lipopolysaccharide" and "X-ray structure of the EmrE multidrug transporter in complex with a substrate" (1–3).

The recently reported structure of Sav1866 (4) indicated that our MsbA structures (1, 2, 5) were incorrect in both the hand of the structure and the topology. Thus, our biological interpretations based on these inverted models for MsbA are invalid.

An in-house data reduction program introduced a change in sign for anomalous differences. This program, which was not part of a conventional data processing package, converted the anomalous pairs (I+ and I-) to (F- and F+), thereby introducing a sign change. As the diffraction data collected for each set of MsbA crystals and for the EmrE crystals were processed with the same program, the structures reported in (1–3, 5, 6) had the wrong hand.

2024 CrowdStrike incident

A software update by CrowdStrike resulted in 8.5 million Microsoft Windows-based systems crashing, unable to restart (across hospitals, airports, companies, ...)
—> largest outage in the history of information technology

They changed one array from 20 entries to 21 entries, which caused a fatal error.

They did not test this change properly:

- their unit tests only tested the most basic case (happy path)
- their manual test only tested valid data

The New York Times

[See more from our live coverage](#)

Chaos and Confusion: Tech Outage Causes Disruptions Worldwide

Airlines, hospitals and people's computers were affected after CrowdStrike, a cybersecurity company, sent out a flawed software update.

[Share full article](#) [Share](#) [Bookmark](#) [Comments 951](#)



Testing basics



A test is just another function

- Imagine we wrote this new function, and we wanted to test it

```
def times_3(x):  
    """Multiply x by 3.  
  
    Parameters  
    -----  
    x : The item to multiply by 3.  
    """  
    return x * 3
```

Testing frameworks

- The collection of tests written to test a package is called a “test suite”
- Execution of a test suite is automated: external software runs the tests and provides reports and statistics
- Main testing frameworks for python:
 - unittest: in the standard library
 - **pytest: what is most commonly used**

```
===== test session starts =====
platform darwin -- Python 3.11.3, pytest-7.3.1, pluggy-1.0.0
collected 2 items

test_first.py::test_times_3_integer PASSED [ 50%]
test_first.py::test_times_3_string PASSED [100%]

===== 2 passed in 0.00s =====
```


Hands-on!

- Go to `hands_on/first`
 1. Discover all tests in all subdirectories
`pytest -v`
 2. Execute all tests in one module
`pytest -v test_first.py`
 3. Execute one single test
`pytest -v test_first.py::test_times_3_string`
 4. Look into `test_first.py`. What do you see?

Test suites in Python with pytest

- Writing tests with pytest is simple:
 - Tests are collected in files called `test_abc.py` , which usually contains tests for the functions defined in a corresponding module `abc`
 - Each test is a function called `test_jkl_feature`, and usually it tests feature of a function called `jkl`
 - Each test checks that the tested function behaves correctly using “assertions”. An exception is raised if it does not work as expected.
 - Each test tests **one feature** in your code

Assertions

- `assert` statements check that some condition is met, and raise an exception otherwise

- Check that statement is true/false:

```
assert 'Hi'.islower()      => fail
```

```
assert not 'Hi'.islower() => pass
```

- Check that two objects are equal:

```
assert 2 + 1 == 3          => pass
```

```
assert [2] + [1] == [2, 1] => pass
```

```
assert 'a' + 'b' != 'ab'  => fail
```

- `assert` can be used to compare all sorts of objects, and `pytest` will take care of producing an appropriate error message

Hands-on! Possibly your first test

- Inside `test_first.py`, test that `times_3([1])` returns what you would expect
- Try to change the expected result in the test to `[2]` (or anything you want) and watch the test break. Look at the error message and make sure you understand what's going on

Hands-on!

- Create a new file, `test_plus.py`:
write a test that asserts that `1+2` is `3`
- What do you expect to happen?
- Execute the test

Hands-on!

- Create a new file, `test_plus.py`:
write a test that asserts that $1+2$ is 3
- What do you expect to happen?
- Execute the test

- Then write a new test and assert that $1.1 + 2.2$ is 3.3
- What do you expect to happen?
- Execute the tests

Floating point equality

- Real numbers are represented approximately as “floating point” numbers. When developing numerical code, we have to allow for approximation errors.

- Check that two numbers are approximately equal:

```
from math import isclose
def test_floating_point_math():
    assert isclose(1.1 + 2.2, 3.3)           => pass
```

- `abs_tol` controls the absolute tolerance:

```
assert isclose(1.121, 1.2, abs_tol=0.1)    => pass
assert isclose(1.121, 1.2, abs_tol=0.01)  => fail
```

- `rel_tol` controls the relative tolerance:

```
assert isclose(120.1, 121.4, rel_tol=0.1)  => pass
assert isclose(120.4, 121.4, rel_tol=0.01) => fail
```

Hands-on!

- One more equality test: check that the sum of these two NumPy arrays:

```
x = np.array([1, 1])
```

```
y = np.array([2, 2])
```

is equal to

```
z = np.array([3, 3])
```


Testing with numpy arrays

```
def test_numpy_equality():  
    x = np.array([1, 1])  
    y = np.array([2, 2])  
    z = np.array([3, 3])  
    assert x + y == z
```

test_numpy_equality

```
def test_numpy_equality():  
    x = numpy.array([1, 1])  
    y = numpy.array([2, 2])  
    z = numpy.array([3, 3])  
> assert x + y == z
```

E ValueError: The truth value of an array with more than one element is ambiguous. Use a.any() or a.all()

code.py:47: ValueError

Testing with numpy arrays

- The module `np.testing` defines helper functions:

```
from numpy.testing import assert_equal, assert_allclose
assert_equal(x, y)
assert_allclose(x, y, rtol=1e-07, atol=0)
```

- If you need to check more complex conditions:

- `np.all(x)`: returns True if all elements of x are true
- `np.any(x)`: returns True if any of the elements of x is true

- combine with `logical_and`, `logical_or`, `logical_not`:

```
# test that all elements of x are between 0 and 1
assert all(logical_and(x > 0.0, x < 1.0))
```

Watch out for nans!

- In general, nan is not equal to itself (IEEE standard)

```
In [2]: np.nan == np.nan  
Out[2]: False
```

- `assert_equal` and `assert_allclose` consider nans equal by default

```
def test_allclose_with_nan():  
    x = np.array([1.1, np.nan])  
    y = np.array([2.2, np.nan])  
    z = np.array([3.3, np.nan])  
    assert_allclose(x + y, z)
```

```
test_numpy_equality.py::test_allclose_with_nan
```

PASSED

Write a working version of `find_maxima`, with testing

- **Read carefully the description of Issue #1 on GitHub**
- Submit a Pull Request for Issue #1
 - Fork the repository (if you haven't already)
 - Create a new branch on the fork called e.g. `fix-1`
 - Solve the issue with one or more commits
 - Push the branch to your GitHub fork
 - On GitHub, go to “Pull Requests” and open a pull request against branch `main` of the official ASPP repository
 - In the PR description write “Fixes #1” somewhere, this is going to create an automatic link to the issue, and close the issue if the PR is merged



Up next: Testing patterns

Testing error control

- Check that an exception is raised:

```
from py.test import raises
def test_raises():
    with raises(SomeException):
        do_something()
        do_something_else()
```

- For example:

```
with raises(ValueError):
    int('XYZ')
```

passes, because

```
int('XYZ')
ValueError: invalid literal for int() with base 10: 'XYZ'
```

Testing error control

- Use the most specific exception class, or the test may pass because of collateral damage:

```
# Test that file "None" cannot be opened.  
with raises(IOError):  
    open(None, 'r')
```

=> fail

as expected, but

```
with raises(Exception):  
    open(None, 'r')
```

=> pass